

MASTERFLOW®

505

(Formerly Grout mortar 505)

High strength, non shrink cementitious construction grout

Description

MASTERFLOW 505 is a ready to use product in powder form, which requires only the on-site addition of water to produce a non shrink grout of predictable performance.

Applications

MASTERFLOW 505 is formulated for use at plastic or flowable consistency, and may be used with confidence for bedding, grouting and void filling operations.

Advantages

- Non shrink.
- Adjustable consistency.
- Proven and predictable performance.
- High bond strength to steel and concrete.
- Early strength development even at flowable consistency.
- Impermeable.

Packaging


MASTERFLOW 505 is supplied in 25kg bags.

Typical properties*

* Properties listed are only for guidance and are not a guarantee of performance.

Water addition	Flowable	4.00 ltrs / 25 kg
	Plastic	3.50 ltrs / 25 kg
Density	Flowable	2230 kg / m ³
	Plastic	2350 kg / m ³
Free expansion:		2 - 4 %
Restrained expansion:		0 - 0.4 %
Compressive Strength N/mm ² ASTM C-109:		Plastic
1 day		26.00
3 day		38.00
28 day		56.00
Flexural Strength N/mm ² BS 6319 Part 3:		Flowable
28 day		6.95
Tensile Strength N/mm ² BS 6319 Part 7:		Flowable
28 day		4.04
Water penetration DIN 1048 Part 5:		< 10 mm

Typical applications

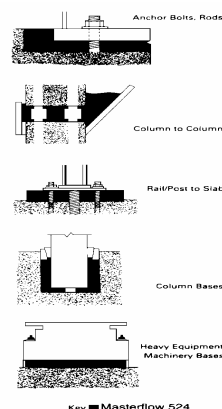

Application procedure

Preparation:

The surface onto which the grout is to be applied should be scabbled to remove laitance and expose aggregate. Do not use bush hammers or similar preparation equipment that can crush the aggregate but leave it in place. The surface must be free of oil, dust, dirt, paint, curing compounds or other contaminants that could impair adhesion. Soak area to be grouted to minimise absorption. Surfaces should be damp but free of standing water. Particular attention should be paid to bolt holes to ensure that these are water-free. Use oil free compressed air to blow out bolt holes and pockets as necessary.

Base plates, bolts, etc. must be clean and free of oil, grease and paint. Set and align equipment. If shims are to be removed after the grout has set, then lightly grease them for easy removal.

Ensure formwork is secure and watertight to prevent movement and leaking during the placing and curing of the grout.

Mixing:

Damp down the inside of the grout mixer with water prior to mixing the initial batch of MASTERFLOW 505. Ensure the mixer is damp but free of standing water. Add the pre-measured quantity of water. Slowly add the MASTERFLOW 505, mixing continuously. Mix for 3-5 minutes until a smooth, uniform, lump free consistency is achieved.

Placing:

Place immediately after mixing, into the prepared area in such a manner that the grout

has the shortest distance to flow. Pour the grout continuously maintaining a constant hydrostatic head wherever possible.

MASTERFLOW grouts are suitable for use with most types of pumping equipment.

Immediately after MASTERFLOW 505 grout is placed, cover all exposed grout with clean wet hessian and keep moist until grout surface is ready to be finished, or until final set.

Alternatively, consider the use of a curing membrane from the MASTERKURE range.

Storage

Store out of direct sunlight, clear of the ground on pallets protected from rainfall. Avoid excessive compaction. Storage life is approximately 12 months when stored in ideal conditions in original sealed bags.

Precautions

The temperature of both the grout and elements coming into contact with the grout should be in the range of +5°C to +35°C. Do not use water in an amount or at a temperature that will produce a consistency more than flowable or cause mixed grout to bleed or segregate.

MASTERFLOW 505 should be laid at a minimum thickness of 10mm and to a maximum depth of 80mm.

For applications above 80mm consider the use of MASTERFLOW 980 T. For applications below 10mm consult Degussa Technical Services Department for advice.

DO NOT OVERWORK AND AVOID USING MECHANICAL VIBRATION.

UNDER NO CIRCUMSTANCES SHOULD MASTERFLOW 505 BE RETEMPERED BY THE LATER ADDITION OF WATER.

It is essential that a mechanically powered grout mixer is used to obtain the optimum properties.

A slow speed drill and mixing paddle may be used for single bag batches only.

Yield / consumption

12.9ltr / 25kg bag at flowable consistency.

78 x 25kg bags / m³.

Note:

For precision grouting of heavy machinery use MASTERFLOW 928 T or in critical operating conditions MASTERFLOW 885.

When a very rapid set is required in areas subject to chemical spillage or contamination, use epoxy grouts MASTERFLOW 400 / 410.

For additional information on MASTERFLOW 505 grout or other non-shrink grouting materials, contact your Degussa representative.

Safety precautions

As with other products containing Portland cement, the cementitious material in MASTERFLOW 505 grout may cause irritation. In case of contact with eyes, immediately flush with plenty of water for at least 15 minutes. Call a physician. In case of contact with skin, wash skin thoroughly.

Note

Field service, where provided, does not constitute supervisory responsibility. For additional information contact your local Degussa representative.

Degussa reserves the right to have the true cause of any difficulty determined by accepted test methods.

Quality

All products produced by Degussa certified manufacturing facilities, are produced to conform to systems designed to meet internationally recognised quality standards.

04/2006Degussa-IR

REQUEST AND REFER TO
RECOMMENDED INSTALLATION
PROCEDURES FOR **MASTERFLOW**
GROUTS PRIOR TO USE