


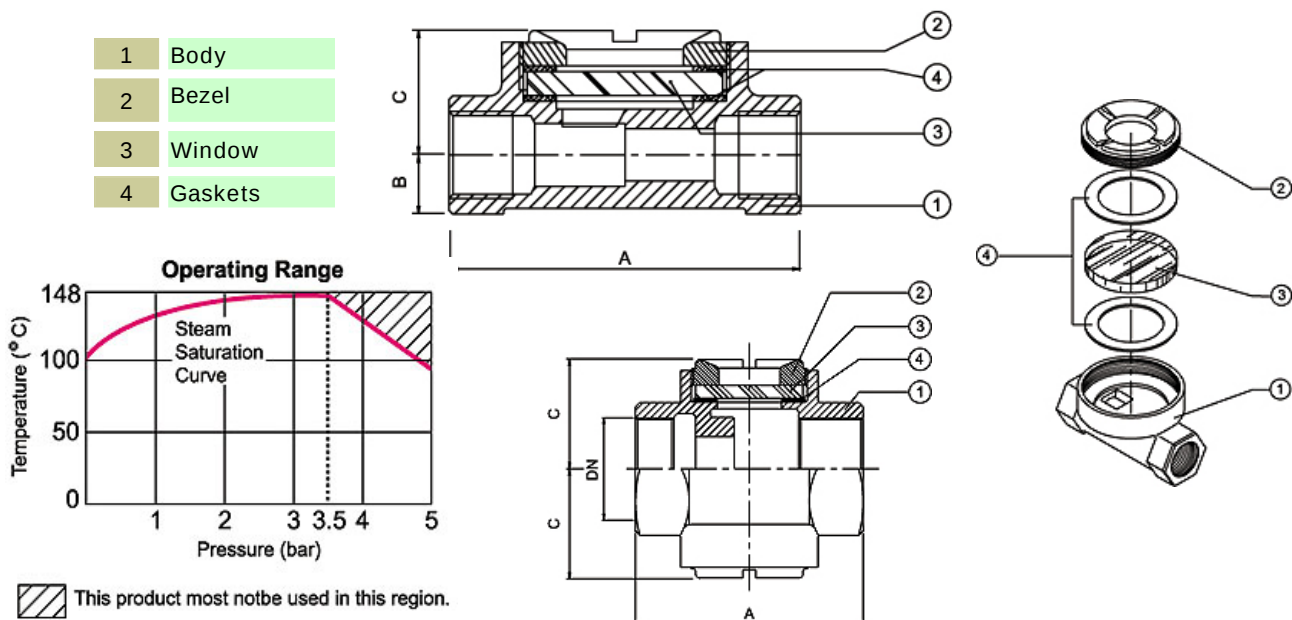

SINGLE WINDOW & DOUBLE WINDOW SIGHT GLASS.

A range of single and double window sight glasses available in either brass or bronze depending on size with screwed connections. Sight Glasses should be fitted on the outlet of a steam trap, on blast discharge types at least 1 m from the trap.

■ Operating conditions:

Max. operating temperature (TMO): 148°C

Max. operating pressure (PMO): 3.5 bar

■ Body design conditions:

Max. Allowable pressure (PMA): 5 bar

Max. Allowable temperature (TMA): 148°C

Cold hydraulic test pressure: 7 bar Threads: BSP or NPT

Material					
No.	Part Name	Material Group	Standards		
			ASTM	JIS	DIN
1	Body	Cast Bronze	C 84400	H5111-BC6	
2	Bezel	Brass	C 38500	H3250-C3604 BE	CuZn39Pb3
3	Window	Pirex			
4	Gaskets	Non Asbestos			

Dimintions (Single Window)					Dimintions (Double Window)				
Nominal Size	A	B	C	Weight (kg)	Nominal Size	A	B	C	Weight (kg)
½	89	16	32	0.6	1 ¼	108	51	1.9	
¾	89	19	35	0.7	1 ½	108	51	1.8	
1	87.5	24	38	0.9	2	114	57	2.5	